



For Single or Double Hinged Doors, Sliding Patios, Folding Walls, Stacking and Bi-Fold Doors

Key Features

Universal Application: Order as either face mount or recess mount to most any door frame. See reverse for illustrations.

Adaptable: Accommodates; single and double entries, sliding patios and larger folding wall, bi-fold and stacking door systems up to 30 feet (9 meters) in width.

Mesh: Compact Pleated Mesh, Unique Market Differentiator.

Manual Operation: Smooth, quiet and safe.

Low Profile Bottom Rail: Barrier free, unrestricted entry, only 3/16" (4mm) tall. Accommodates flat and angled surfaces with a PVC angled spacer.

Integration: Easily installs to new or existing construction, no modification to floor or framework, adapts to any surface.

Wire Tension System: Keeps mesh taught.

Retracting Mesh Guide: *Maximum insect protection, maintains the position of the mesh, then disappears when retracted.*

Made to Order: Custom sized for each application.

Specifications

Material: Frames; Extruded Aluminum, Powder Coat.

Injection Parts: PVC, ABS, Nylon.


Others: Stainless Steel


Mesh: Monofilament PP/PE Blend, 20x20 **Color:** White, Black, Dark Brown, Silver

Accessories: Replacement Main Screen Cartridge (RMSC).

Note; Some size restrictions apply on larger units, contact a local dealer for more information.

Size: Accommodating openings; W=32" (813mm) ~ 78 3/4" (2 meters), H=60" (1524mm) ~ 10ft (3 meters).

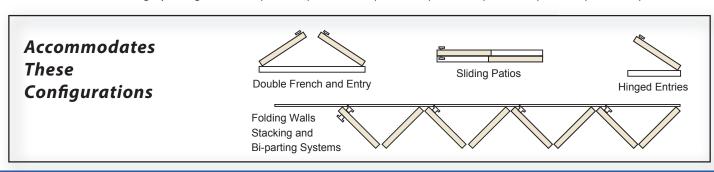

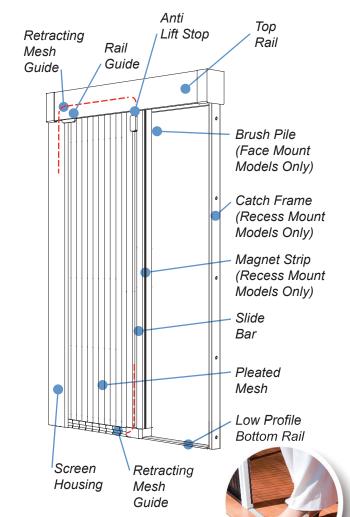












Foldaway-PF Housing Sizes:

Up to 43 3/8" - Standard Housing Larger Than 43 7/16" - XL Housing Face Mount & Recess Mount Applications, Single and Multiple Panel Configurations

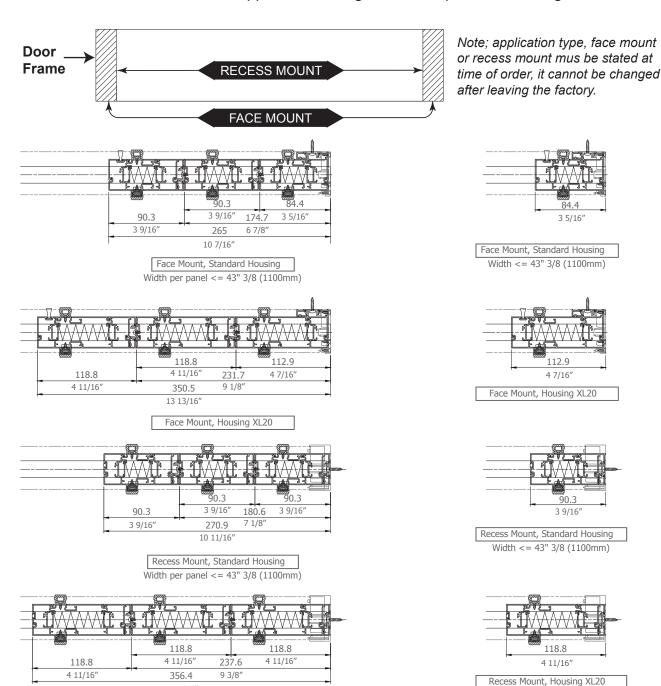





14 1/16

Recess Mount, Housing XL20





Panel Configurations

Foldaway-PF allows for one point of egress, see below.

